


Fast safety solenoid valve One way - Normally closed Type EV


www.deltapumps.com

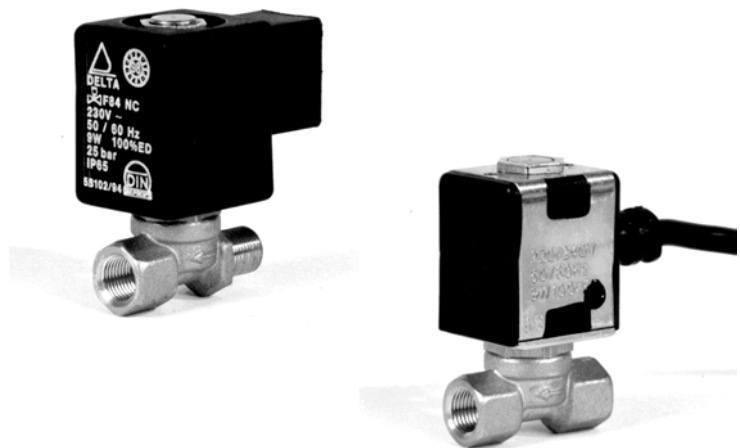

F84 - M8

Valve identification	EV	8MF	F	B	700
Valve type					
Connections 8MF = 1/8"Male-1/8"Female 8FF = 1/8"Female-1/8"Female 8M4M = 1/8"Male-1/4"Male					
Thread type = BSP N = NPT					
Coil type F = Connector plug M = Flexible metal conduit					
Supply voltage A = 230V 50-60Hz B = 110V 50-60Hz C = 24V 50-60Hz D = 12V 50-60Hz			E = 24V DC F = 380V 50-60Hz		
Cable length 300 mm 400 mm 500 mm		700 mm (standard) 1000 mm 1600 mm			

Coil styles

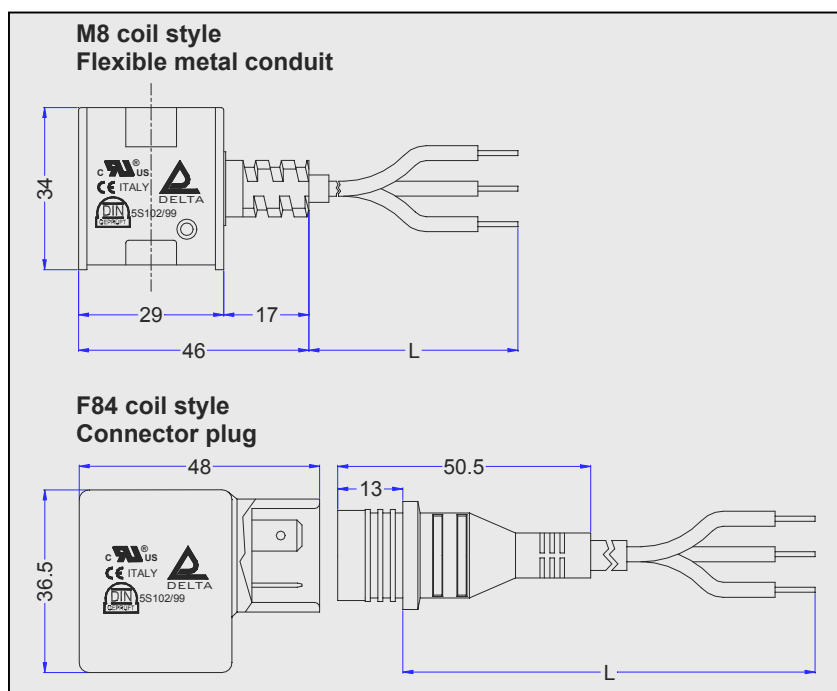

The Delta solenoid valves are available with two different styles of coil.

The M8 style with molded cable offers a fast and efficient method of connection resulting in greatly reduced installation time and cost.

The F84 style with an integral connector plug can easily be plugged directly into a standard electrical supply line connector, simplifying coil replacement.